



MADE BY NATURE

PRODUCT CATALOGUE

SPC / LVT FLOORING
& ACCESSORIES

WOOD LOOK · STONE LOOK · WOVEN & CARPET LOOK




CONTENTS



ABOUT WALDHÖF

ENVIRONMENTAL & CERTIFICATION	05
WHY CHOOSE WALDHÖF	06
QUALITY CONTROL	07
PRODUCTION PROCESS	08
PRODUCTION INSPECTION	10

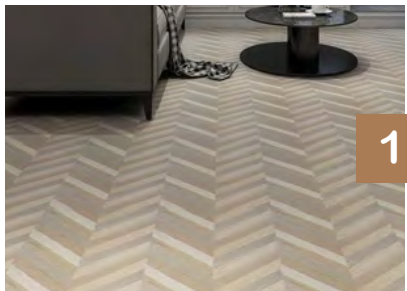

SPC/LVT FLOORING

STRUCTURE & FUNCTIONS	13
WOOD LOOK	15
STONE LOOK	29
WOVEN & CARPET LOOK	39



ACCESSORIES

SPC/PVC SERIES	50
WPC SERIES	52
PVC SERIES	54
ALU SERIES	55



ABOUT WALDHÖF



Waldhöff offers SPC/LVT flooring in wood, stone and woven & carpet looks, together with a complete range of matching accessories. Each collection is selected for its natural appearance, its durability and its consistent quality, for residential and commercial projects alike.

Our floors are manufactured by an experienced partner specialised in rigid core vinyl flooring since 1996. Its ISO 9001 certified facilities and FloorScore® certified products keep every critical step under control, from the preparation of raw materials to each stage of production, so that every floor we deliver meets the highest quality standards.

Environmental & Certification



ECO-FRIENDLY

All our vinyl flooring products do not contain heavy metals, phthalate, methanol and other harmful substances. It does no harm to human body and the environment. You can move your house as soon as your flooring decoration finished without worrying absorbing harmful VOC substances, thereby having an adverse impact on your health.



INHERENT SAFETY FEATURES

In addition to formaldehyde free, our vinyl flooring products have 100% waterproof properties, NFPA Class B fire rating and R9 slip resistance performance. Its inherent safety features make our products perfectly meet the safety requirements for commercial and residential flooring.



FLOORSCORE CERTIFIED

All our vinyl flooring products are FloorScore certified. FloorScore is the most recognized indoor air quality (IAQ) certification standard for hard surface flooring materials, adhesives, and underlayments. Most of us spend as much as 90% of our lives indoors, choosing FloorScore certified flooring means you're choosing a healthy lifestyle for your family.



CE CERTIFIED

All our vinyl flooring products are CE certified. It certifies that our flooring products have met the requirements of Regulation for the Marketing of Construction Products R305/2011 and related standards European harmonized standard EN 14041 in terms of safety, environmental protection, health and consumers protection. All our flooring products are quality assured, you can purchase our products without worries.



PET-FRIENDLY

Pets bring our laughs and fun. They are our families. However, pets also bring troubles to pet owners as their sharp claws always tend to damage the floor surface. Our vinyl flooring products provide superior wear and scratch resistance to allows your pets walking on the floor freely without damaging your floor surface.



EASY CLEANING

Our vinyl flooring products are waterproof and stain resistant. It only requires regular vacuuming or sweeping and occasional mopping. Normal dirt and debris can be easily swept away with a broom. Sticky spots can be easily removed with a wet mop for a more intense clean. It is a great choice for busy householders and shop owners.



Why Choose Waldhöff?

8

PRODUCTION LINES

8 advanced equipment can reduce production loss and guarantee short production time and timely delivery.

1000+ M² WORKSHOP

Large workshop guarantees the large output and workshop management running. And it can certify our enterprise strength to serve better for large order customers.

20,000 M² DAILY CAPACITY

8 advanced equipment can reduce production loss and guarantee short production time and timely delivery.

5

QUALITY INSPECTION

We have strict quality control system to inspect our products before, during and after production.

300+ COLOR RANGES

Our products cover SPC/LVT flooring and accessories, each with a wide range of options to save you selection time.

24h SERVICE

We have more than 20 professional sales representatives to reply your consultation, recommend flooring and quote your inquiries.

100%

CUSTOMER SATISFACTION

We aim to get customers' satisfaction with qualified products, professional support and rapidly trouble removal to eliminate customers' worries

10000

CLASSICAL PROJECTS

Our products have exported to more than 50 countries and gain high reputation from our customers and agents. They certify our quality and popularity.

0

FREE SAMPLE

We can supply free samples for customers to test and accept trial orders. Besides, you can get special discount when you order large orders.

LIMITLESS

We are and will always be continuously improve technology and research new products to serve customer better.

QUALITY CONTROL

Quality determines if the business can survive and succeed. As a result, we attach great importance to product quality and do everything we can to ensure all products we supply are qualified and exceed customers' expectations. To stay afloat, we take the following quality control measures to ensure smooth production and stable product quality.

PRODUCTION PROCESS



We have introduced fully automatic production lines to monitor and control our production process and improve our production efficiency. All production will start with sample. When the sample is tested to be qualified, normal production can start.




1: MIXING



2: EXTRUSION



3: UV COATING



4: CUTTING



5: SLOTTING



6: PADDING (OPTIONAL)





PRODUCTION INSPECTION

During the production, we take several samples from each batch of products and carry out random testing. Typically, our carry out the following inspections and tests to ensure that every batch of products are qualified and in compliance with international standards and customer requirements.

THICKNESS INSPECTION



LENGTH INSPECTION




WIDTH INSPECTION



Peel resistant test



Wear resistance test



Click detection



UV aging test



SPC/LVT FLOORING

Short for stone plastic composite, SPC/LVT flooring is a new generation of floor covering that combines limestone and stabilizers to create an extremely durable core. It is the most durable waterproof vinyl flooring on the market. It gives a more realistic look and feel of actual wood, stone or ceramic floors and is widely used in a variety of residential and commercial decorations.



Eco Friendly



100% Waterproof



Fireproof



Scratch Resistant



Anti-Slip



Anti-Bacteria



Stain Resistance




Sound Insulation



Warm Underfoot



Easy Cleaning




Easy Installation



Easy Maintenance

SPC/LVT FLOORING

STRUCTURE & FUNCTIONS

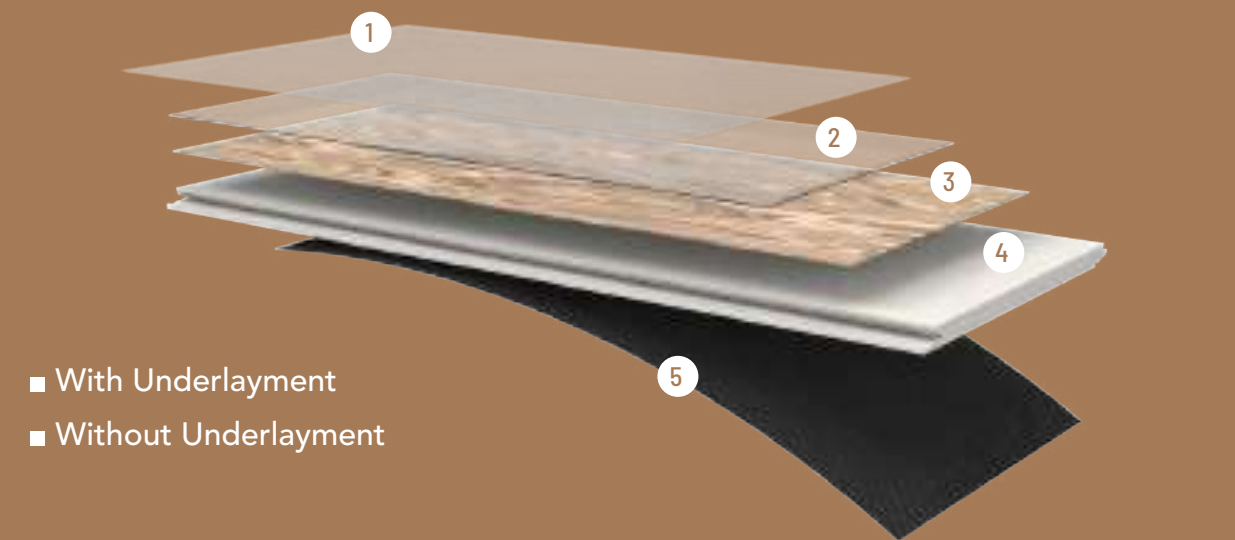

- With Underlayment
- Without Underlayment

①

UV Layer
• Anti-aging
• Stain resistance
• Easy to clean

②

Wear Resistant Layer
• Superior wear resistance
• Decoration layer protection
• B1 fire retardant

③

Decoration Layer
• Wood/stone/woven/carpet options
• Variation on colors available
• Exclusive designs available

④

SPC Vinyl Layer
• 100% waterproof
• Super stability for lifetime
• Great for uneven subfloors

⑤

Underlayment Layer (optional)
• IXPE/EVA options
• Sound resistance
• Moisture resistance



184 × 1220 mm



151 × 920 mm





313 × 620 mm





Item	Detection Result	Detection Method	
Dimension	151 × 920 mm; 184 × 1220 mm, 313 × 620 mm	EN 427	✓
Thickness in total	3.2–12 mm	EN 428	✓
Thickness of wear layers	0.1–0.7 mm	EN 429	✓
Weight in total	17.8 kgs/box	EN 430	✓
Peeling strength of layers	Pass	EN 431	✓
Shearing force of layers	Good	EN 432	✓
Residual indentation after static load	Mean value 0.01 mm	EN 433	✓
Dimension stability	Shrinkage ≤ 0.002%; curling ≤ 0.02 mm	EN 434	✓
Flexibility – 10 mm mandrel	No damage	EN 435	✓
Resistance to chemicals	Class zero	EN 423	✓
Bearing a castor chair	No disturbance, no delamination	EN 425	✓
Color fastness to light	≥ 6	ISO 105 B02	✓
Wear resistance	Pass	EN 660	✓
Toxic	Complies	EN 71-3	✓
Resistance to fire	NFPA class B		
Slip resistance	R9		
Performance classification	23, 34, 43		
GB/T4085 PVC block material performance testing		Pass	×
GB 8624 B1 grade flammability testing			
CNS 8907 anti-flaming testing		Pass	×

EDGE TYPE & CATEGORY




Small Beveled




Macro Beveled




Wood Look



Stone Look




Woven & Carpet Look





SPC/LVT FLOORING WOOD LOOK

Wood look SPC/LVT flooring, also known as wood SPC flooring or SPC/LVT wood flooring, preserves the look and texture of natural wood while providing better dimensional stability, greater water resistance and a more comfortable foot feel than real wood flooring.



WOOD LOOK

These realistic wood look designs come in many different colors, patterns and surface treatments. The high definition decoration layer of SPC/LVT flooring lets you enjoy the classic beauty of real wood flooring without worrying about floor deformation and damage caused by moisture and temperature changes.



WOOD LOOK SPC/LVT FLOORING

INTEGRATES WOOD BEAUTY & EXCEPTIONAL DURABILITY



EXCEPTIONAL DURABILITY

We offer a 25-year warranty for our residential SPC/LVT flooring and a 10-year warranty for our commercial SPC/LVT flooring. All our SPC/LVT flooring is provided with a wear layer that can withstand about 10,000 wear-resisting revolutions and higher. It ensures our SPC/LVT flooring works well in both residential and commercial environments.



STAIN RESISTANCE

SPC/LVT flooring surface is covered with a specially treated UV layer and wear layer that provide excellent stain resistance performance. Besides, SPC/LVT flooring is 100% waterproof and stains can be completely removed with a broom or a wet mop. It helps you save a lot of time on flooring cleaning.



FLAME RETARDANT

According to the statistics of authoritative departments, 95% of the people injured in fires are harmed by toxic gas generated when burning. The main component of SPC/LVT flooring is natural limestone powder: in case of fire, SPC/LVT flooring has great flame retardant performance and will not produce asphyxiating, toxic or harmful gas.



EASY INSTALLATION

Our SPC/LVT flooring is provided with Unilin click systems for simple and quick installation, which makes glue-free and nail-free installation possible. Tiles and planks click into place with one simple movement. Besides, it can be easily installed on a variety of subfloors or existing flooring, saving you time and money.



100% WATERPROOF

As the SPC/LVT vinyl layer is completely waterproof, SPC/LVT flooring has excellent waterproof and dampproof performance. Mildew will not happen on SPC/LVT flooring, which keeps your floor as good as new. As a result, it is widely used in laundry rooms, bathrooms, basements and kitchens.



WARM UNDERFOOT

SPC/LVT flooring has excellent thermal conductivity and can help maintain floor temperature, so it does not get cold even during rainy days. Unlike the hard surface of ceramic floors, SPC/LVT flooring is soft and provides extra comfort when standing or walking on it barefoot.



ECO-FRIENDLY

Made of 100% recycled natural limestone powder and virgin PVC, all our SPC/LVT flooring is free of heavy metals, phthalates, methanol and other harmful substances. It does no harm to the environment or the human body.




EASY MAINTENANCE

SPC/LVT flooring is easy to clean. It only requires regular vacuuming or sweeping and occasional mopping. Normal dirt and debris can be easily swept away with a broom. Sticky spots can be easily removed with a wet mop for a more intense clean. It is a great choice for busy households.






WOOD LOOK SPC/LVT FLOORING SURFACE PATTERNS

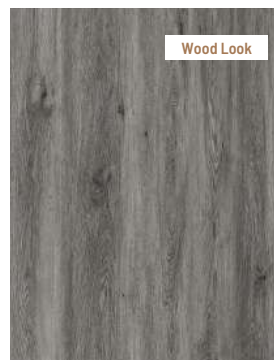


WH-1701



WH-1702

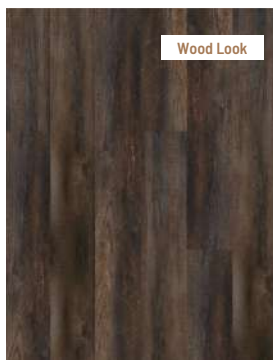

WH-1703

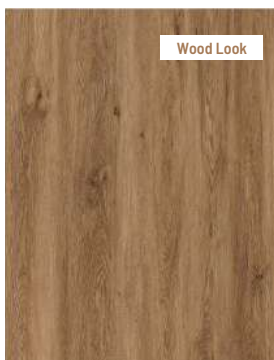


WH-1704



WH-1705



WH-1706

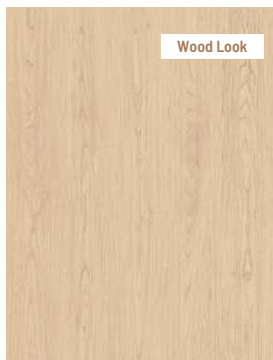

WH-1707



WH-1708



WH-1710




WH-1712



WH-1716




WH-1717

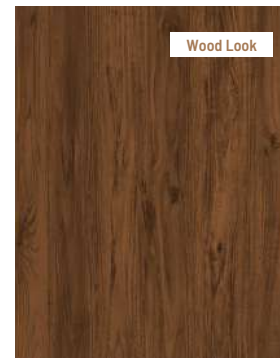

WH-1718



WH-1750

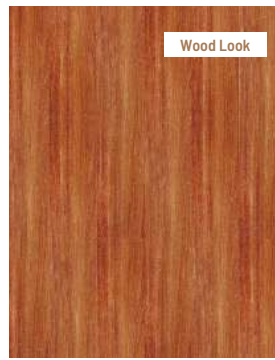

WH-1751



WH-1752




WH-1753



WH-1754




WH-1755

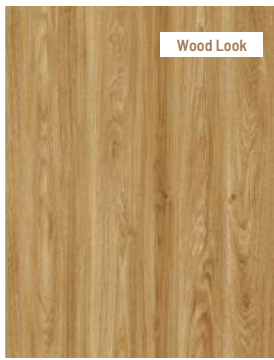


WH-1756




WH-1757

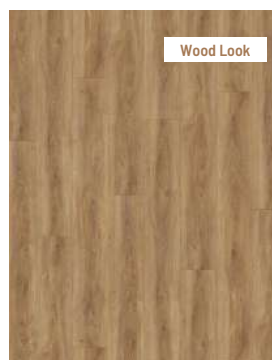


WH-1780

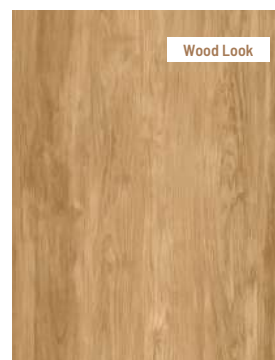


WH-1782

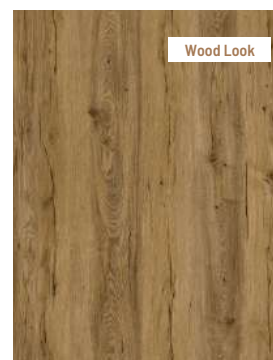


WH-1785

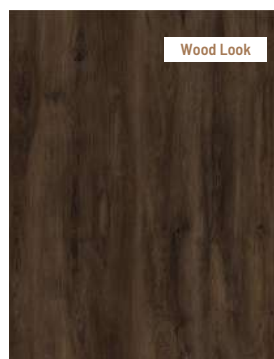


WH-1788

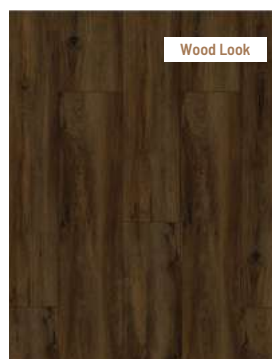

WH-1789

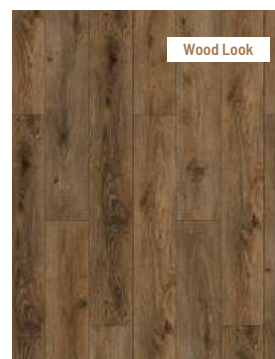


WH-9901

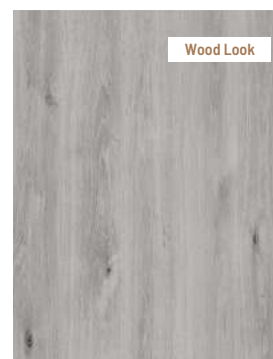

WH-9903




WH-9904

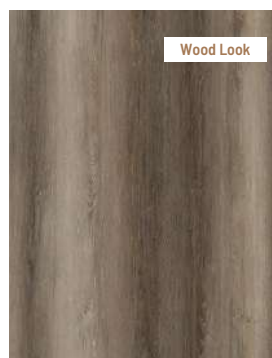

WH-9905




WH-9907

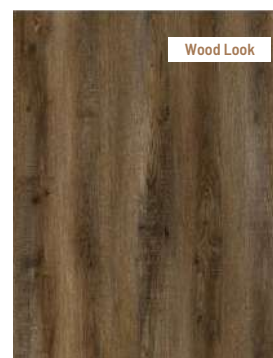


WH-9909



WH-9911

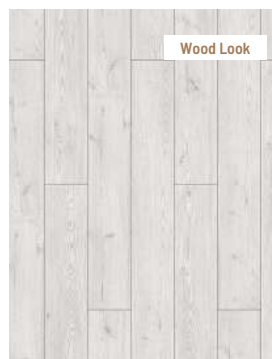

WH-9912

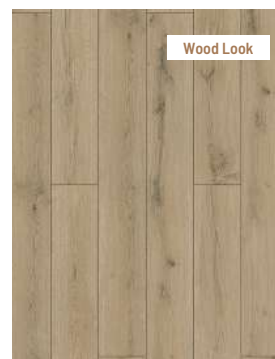


WH-9913



WH-1901



WH-1904

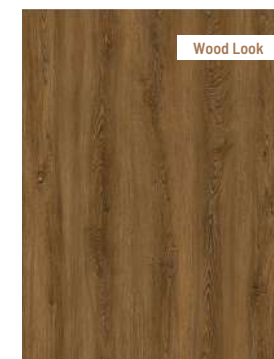

WH-1905



WH-1906




WH-1909






WH-1913

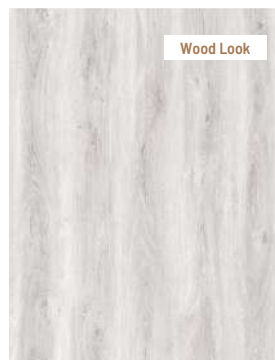

WH-1916

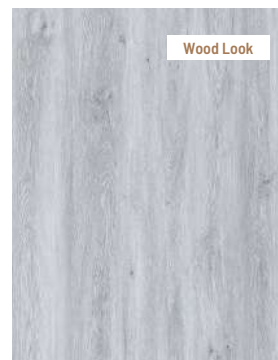

WH-1918




WH-1960




WH-1966




WH-1968

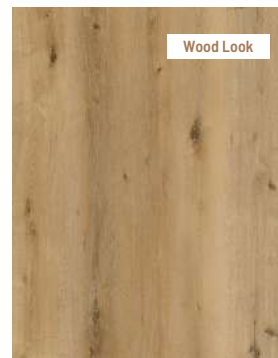


WH-1969-36

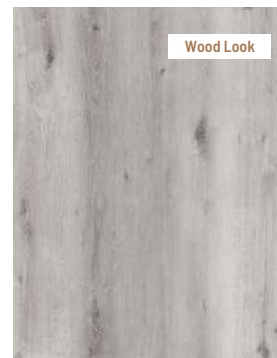


WH-1936-51

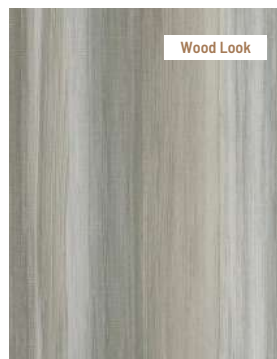

WH-1972

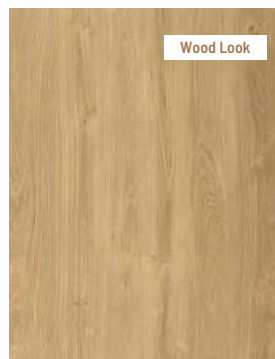


WH-1973

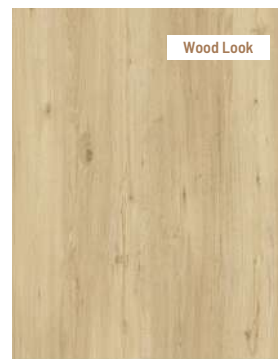

WH-1976




WH-1979

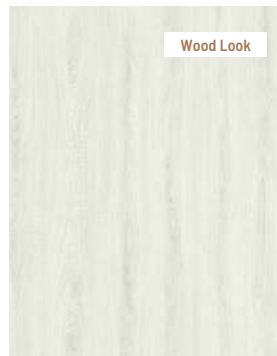


WH-1980



WH-1981

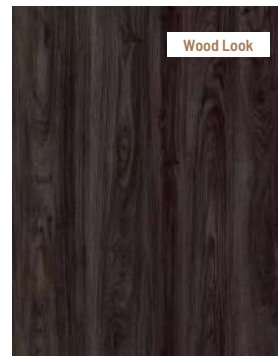


WH-1984

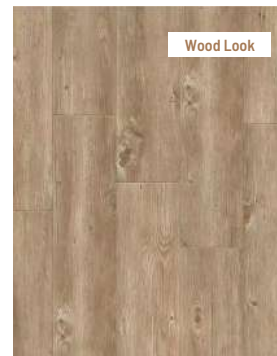

WH-1985

WOOD LOOK SPC/LVT FLOORING NEW ARRIVALS

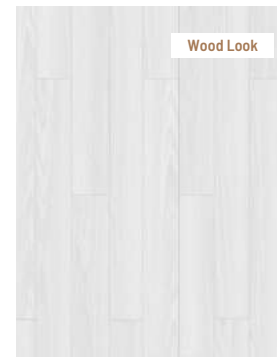


WH-1989




WH-2155




WH-2156

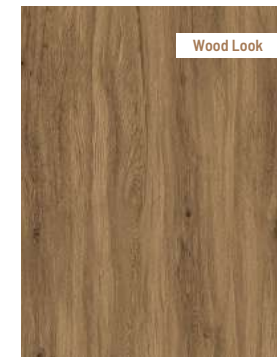


WH-2157

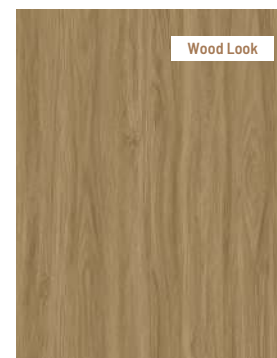


WH-2158

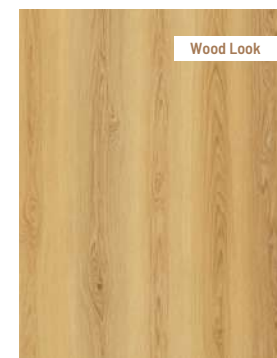


WH-2160

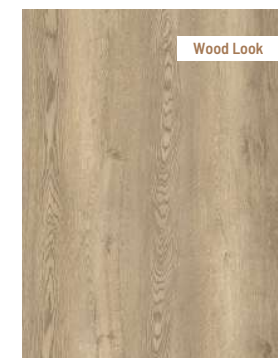

WH-2166

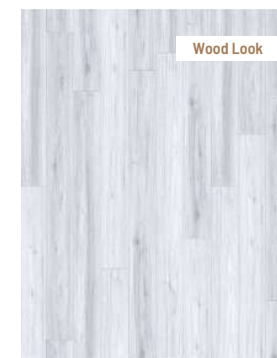

WH-2171

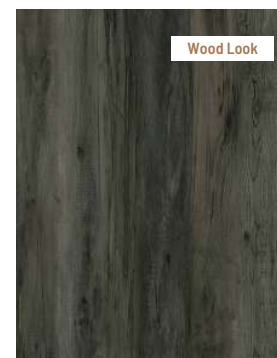

WH-2172



WH-2173

WOOD LOOK SPC/LVT FLOORING

INSTALLATION & MAINTENANCE

Precautions before installation

-  SPC/LVT flooring should be leveled and placed on site with constant temperature and stability for 24 hours before installation;
-  Make sure the subfloor is smooth and clean before installing the flooring, without any residue;
-  When installing the flooring, the indoor temperature should be kept between 15 °C and 28 °C. Indoor temperature and surface temperature at 15 °C are recommended. When the temperature is lower than 5 °C or higher than 30 °C, the installation shall not be performed. The relative air humidity suitable for construction should be between 20% and 75%.
-  The moisture content of the base layer shall be less than 3%. The strength of the base layer shall not be lower than the requirement of concrete strength C-20, otherwise suitable self-leveling should be used to strengthen the strength. The surface hardness of the base layer is not less than 1.2 MPa.


INSTALLATION



STEP 1

Before installation, it is recommended to spread floor film, which can make better feeling of feet and prevent the noise generated between the ground and the floor by small grains of sand. Put the first floor from the left corner of the room.


1

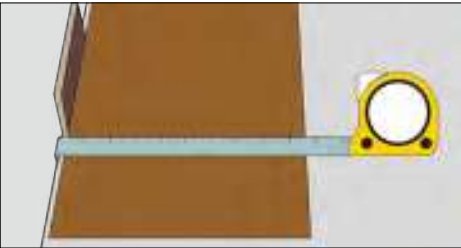

STEP 2

To prevent the natural expansion of the floor, at least 0.4 cm gap should be reserved between the wall and the floor.


2

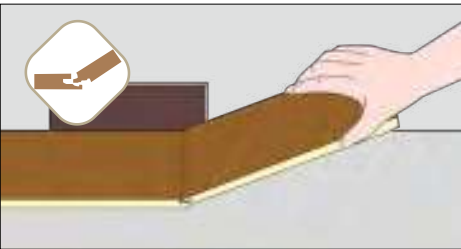

STEP 3

When installing the first and second floor, insert the convex damage of the short side into the groove of the first floor. Continue to use the above method to install other floors.


3

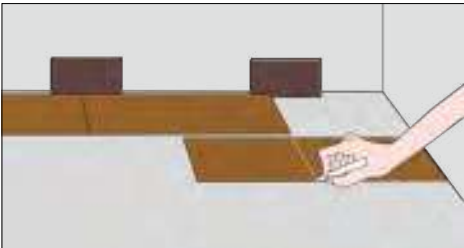

STEP 4

When installing the last piece of the first row, you need to take the remaining part of the floor measurement first, and note that the floor needs to be measured in reverse.

4

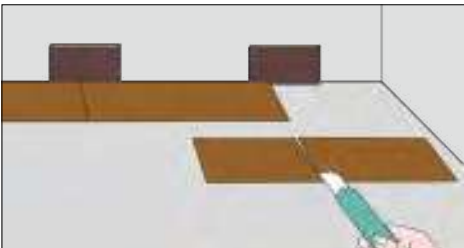

STEP 5

Finally, use the art knife to force the floor surface, break it by hands easily, then install the last floor of the first row.

5



STEP 6

Start installing the second row. When installing the second floor, insert the convex of the short side into the groove of the previous floor, and gently insert the convex of the long side into the corresponding floor groove.


6



STEP 7

Use a rubber hammer when there are gaps.

7

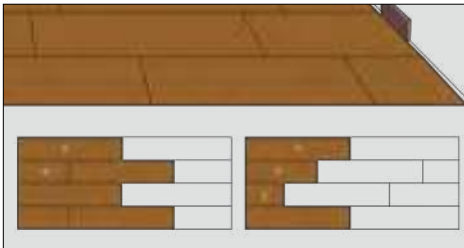

STEP 8

Recommended installation method reference picture.

8



STEP 9

Finally, the same method can be used to install other floors in the room to ensure that necessary expansion gaps are left between all fixed vertical planes in the room, including doors, walls, cabinets and other fixed objects.

9



WOOD LOOK SPC/LVT FLOORING **100% WATERPROOF**

Thanks to the high durability and 100% waterproof performance, it only takes a few simple care and maintenance steps to keep your SPC/LVT flooring looking new and beautiful for years to come.



Always clean up spills or liquids immediately.



Clean dust and debris regularly with a broom or vacuum with soft bristles.



Mop as needed, use a dampened mop and cleaner approved for use on SPC/LVT flooring. Never use harsh cleaning chemicals on SPC/LVT flooring to avoid floor damage.



Use felt protectors or other protective devices under furniture. Never push, pull, or drag furniture across SPC/LVT flooring. Always lift and carry.









Heavy furniture or appliances that are not moved often should be equipped with flat, nonstaining floor protectors.



Place mats at exterior doors to reduce dirt and debris tracked into floor. Do not use mats with rubber or latex backers as they may cause discoloration or staining to SPC flooring.




For spot stain treatment, use a diluted bleach solution that is 1 part bleach, 10 parts water.

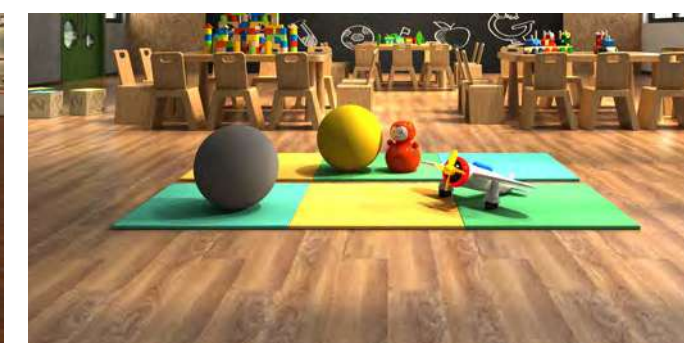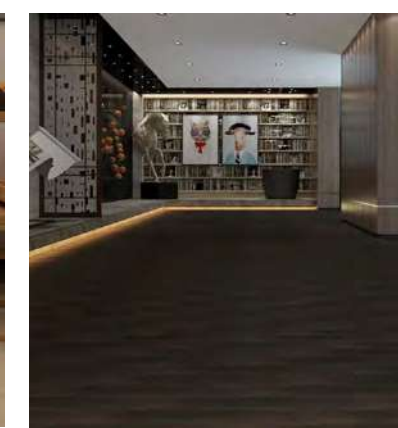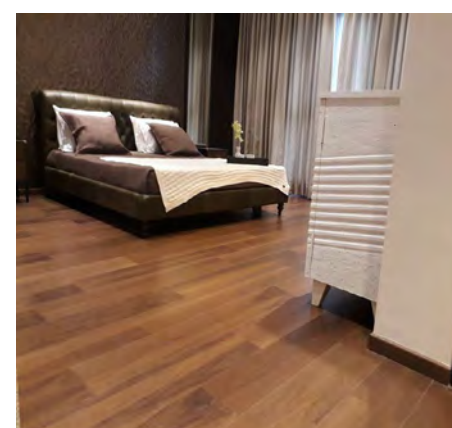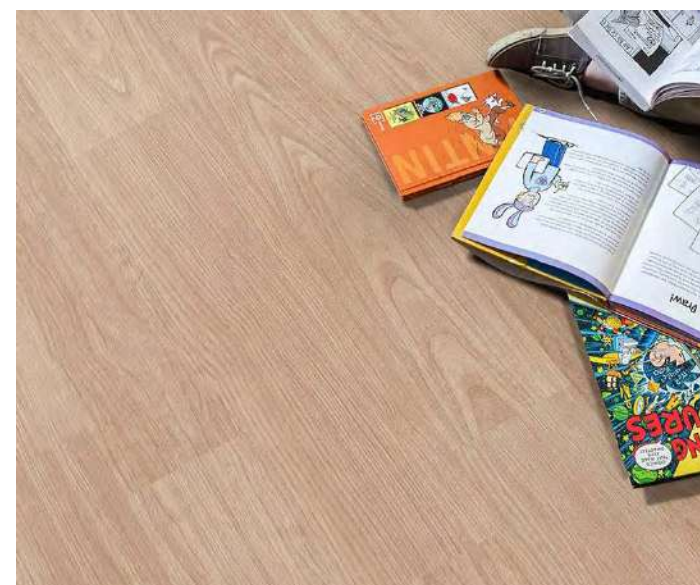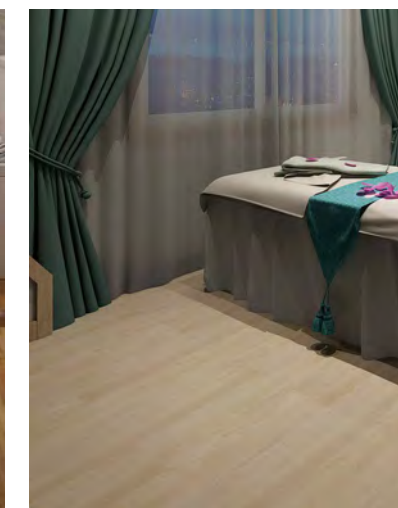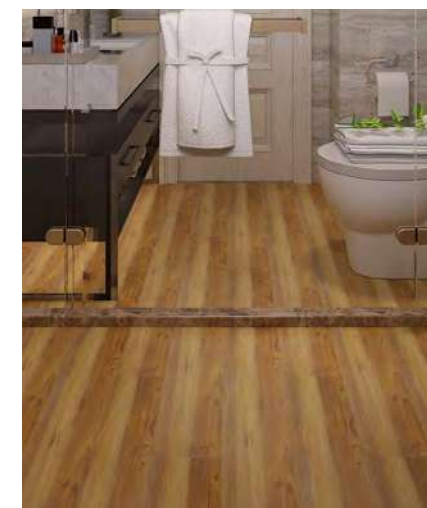




SPC/LVT FLOORING STONE LOOK

Stone look SPC/LVT flooring, also known as SPC/LVT stone flooring, refers to rigid core vinyl flooring that offers the look, feel and stability of high-end natural stone flooring while providing a warmer and more comfortable underfoot than natural stone.



STONE LOOK

These realistic stone look designs come in many different colors, patterns and styles. The high definition decoration layer of SPC/LVT flooring offers the look and feel of natural stone without the need to treat it with a sealing agent. Besides, our stone look SPC/LVT flooring is more budget-friendly than natural stone flooring.

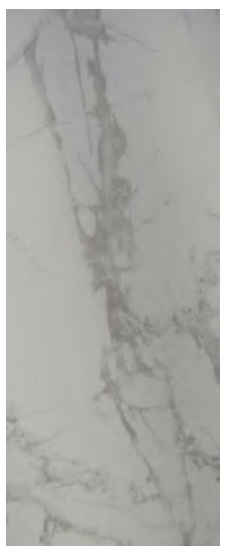

STONE LOOK SPC/LVT FLOORING

COMBINES STONE BEAUTY & GREAT IMPACT RESISTANCE



EXCEPTIONAL DURABILITY

We offer a 25-year warranty for our residential SPC/LVT flooring and a 10-year warranty for our commercial SPC/LVT flooring. All our SPC/LVT flooring is provided with a wear layer that can withstand about 10,000 wear-resisting revolutions and higher. It ensures our SPC/LVT flooring works well in both residential and commercial environments.



ANTI-SLIP

Compared with other flooring materials, SPC/LVT flooring has great anti-slip performance. When SPC/LVT flooring is wet, the friction increases and the feet keep a better grip. In this way, pedestrians and customers can effectively avoid slipping and falling on wet floors.



FLAME RETARDANT

According to the statistics of authoritative departments, 95% of the people injured in fires are harmed by toxic gas generated when burning. The main component of SPC/LVT flooring is natural limestone powder: in case of fire, SPC/LVT flooring has great flame retardant performance and will not produce asphyxiating, toxic or harmful gas.



EASY INSTALLATION

Our SPC/LVT flooring is provided with Unilin click systems for simple and quick installation, which makes glue-free and nail-free installation possible. Tiles and planks click into place with one simple movement. Besides, it can be easily installed on a variety of subfloors or existing flooring, saving you time and money.



WARM UNDERFOOT

SPC/LVT flooring has excellent thermal conductivity and can help maintain floor temperature, so it does not get cold even during rainy days. Unlike the hard surface of ceramic floors, SPC/LVT flooring is soft and provides extra comfort when standing or walking on it barefoot.



IMPACT RESISTANCE

The core of SPC/LVT flooring is soft and elastic. Under the impact of heavy objects, SPC/LVT flooring offers strong impact resistance and great resilience, and will not cause floor damage. Besides, it also minimizes damage to the body and disperses impact on the foot, thereby avoiding injuries.



ECO-FRIENDLY

Made of 100% recycled natural limestone powder and virgin PVC, all our SPC/LVT flooring is free of heavy metals, phthalates, methanol and other harmful substances. It does no harm to the environment or the human body.




EASY MAINTENANCE

SPC/LVT flooring is easy to clean. It only requires regular vacuuming or sweeping and occasional mopping. Normal dirt and debris can be easily swept away with a broom. Sticky spots can be easily removed with a wet mop for a more intense clean. It is a great choice for busy households.







STONE LOOK SPC/LVT
FLOORING SURFACE
PATTERNS

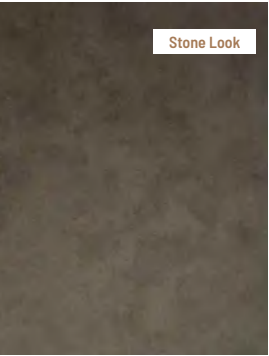


WH-9008-B

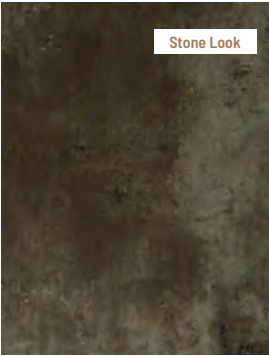

WH-9009-1

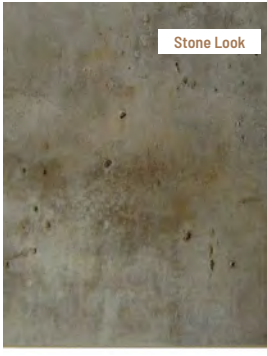

WH-9009-4

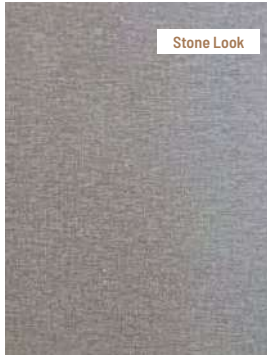


WH-9010-08




WH-9015




WH-9016

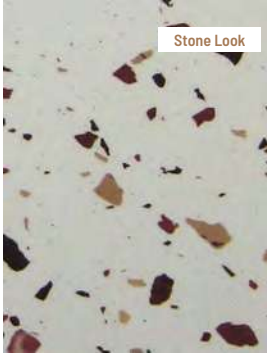


WH-9021

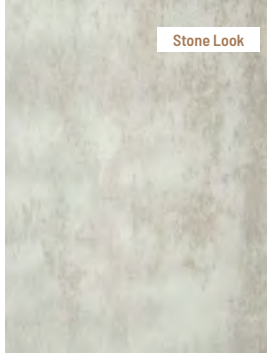

WH-9022

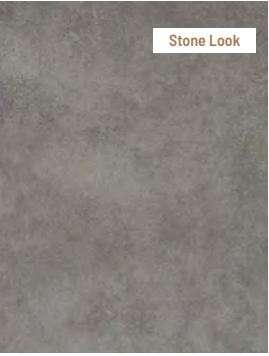


WH-9023

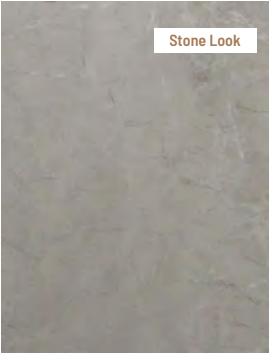


WH-9024



WH-9025

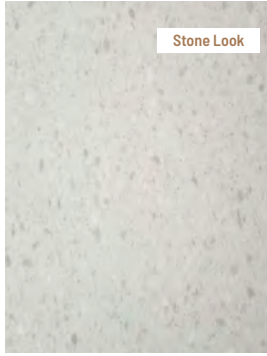

WH-9026

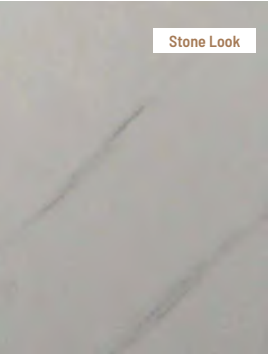

WH-9027




WH-9028




WH-9005



WH-9005

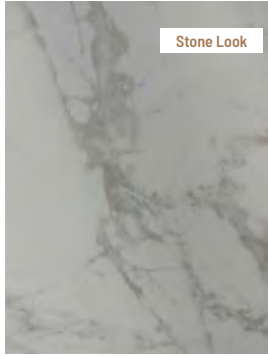

WH-9007

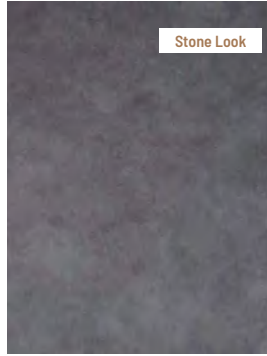

WH-9008-24


STONE LOOK SPC/LVT FLOORING

INSTALLATION & MAINTENANCE

Precautions before installation


-  SPC/LVT flooring should be leveled and placed on site with constant temperature and stability for 24 hours before installation;
-  Make sure the subfloor is smooth and clean before installing the flooring, without any residue;
-  When installing the flooring, the indoor temperature should be kept between 15 °C and 28 °C. Indoor temperature and surface temperature at 15 °C are recommended. When the temperature is lower than 5 °C or higher than 30 °C, the installation shall not be performed. The relative air humidity suitable for construction should be between 20% and 75%.
-  The moisture content of the base layer shall be less than 3%. The strength of the base layer shall not be lower than the requirement of concrete strength C-20, otherwise suitable self-leveling should be used to strengthen the strength. The surface hardness of the base layer is not less than 1.2 MPa.

INSTALLATION

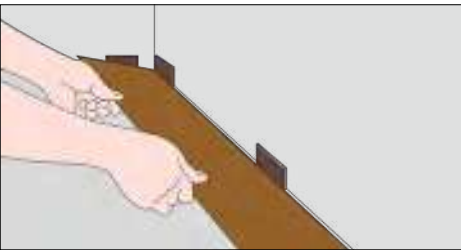


STEP 1

Before installation, it is recommended to spread floor film, which can make better feeling of feet and prevent the noise generated between the ground and the floor by small grains of sand. Put the first floor from the left corner of the room.

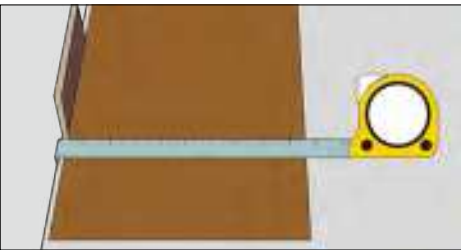


STEP 2

To prevent the natural expansion of the floor, at least 0.4 cm gap should be reserved between the wall and the floor.

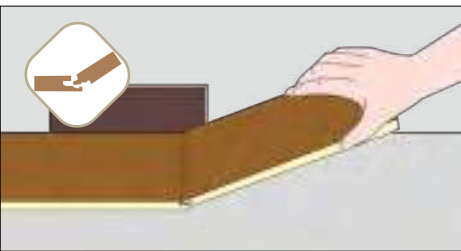


STEP 3

When installing the first and second floor, insert the convex damage of the short side into the groove of the first floor. Continue to use the above method to install other floors.

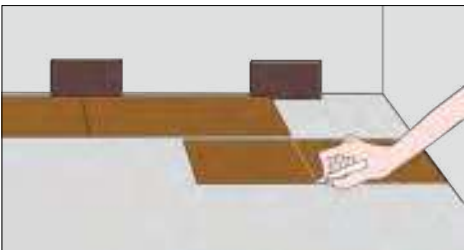


STEP 4

When installing the last piece of the first row, you need to take the remaining part of the floor measurement first, and note that the floor needs to be measured in reverse.

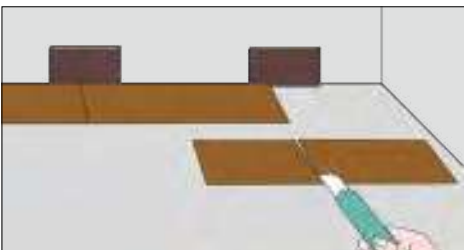

STEP 5

Finally, use the art knife to force the floor surface, break it by hands easily, then install the last floor of the first row.

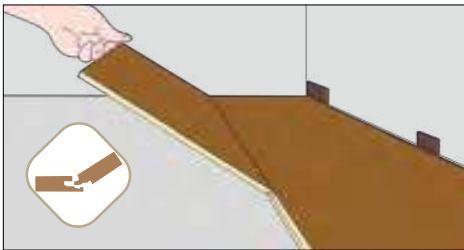


STEP 6

Start installing the second row. When installing the second floor, insert the convex of the short side into the groove of the previous floor, and gently insert the convex of the long side into the corresponding floor groove.



STEP 7

Use a rubber hammer when there are gaps.

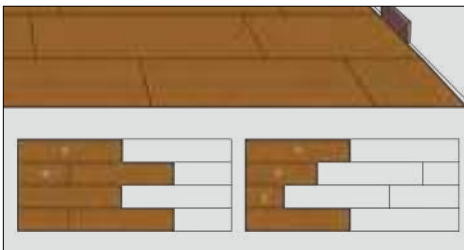

STEP 8

Recommended installation method reference picture.



STEP 9

Finally, the same method can be used to install other floors in the room to ensure that necessary expansion gaps are left between all fixed vertical planes in the room, including doors, walls, cabinets and other fixed objects.



STONE LOOK SPC/LVT FLOORING **100% WATERPROOF**

Thanks to the high durability and 100% waterproof performance, it only takes a few simple care and maintenance steps to keep your SPC/LVT flooring looking new and beautiful for years to come.



Always clean up spills or liquids immediately.



Clean dust and debris regularly with a broom or vacuum with soft bristles.



Mop as needed, use a dampened mop and cleaner approved for use on SPC/LVT flooring. Never use harsh cleaning chemicals on SPC/LVT flooring to avoid floor damage.



Use felt protectors or other protective devices under furniture. Never push, pull, or drag furniture across SPC/LVT flooring. Always lift and carry.






Heavy furniture or appliances that are not moved often should be equipped with flat, nonstaining floor protectors.



Place mats at exterior doors to reduce dirt and debris tracked into floor. Do not use mats with rubber or latex backers as they may cause discoloration or staining to SPC/LVT flooring.




For spot stain treatment, use a diluted bleach solution that is 1 part bleach, 10 parts water.

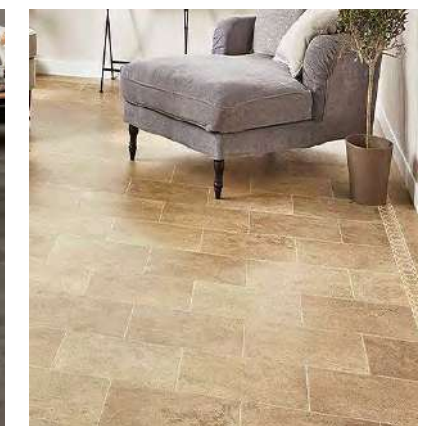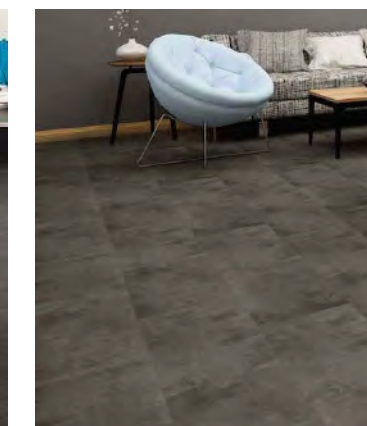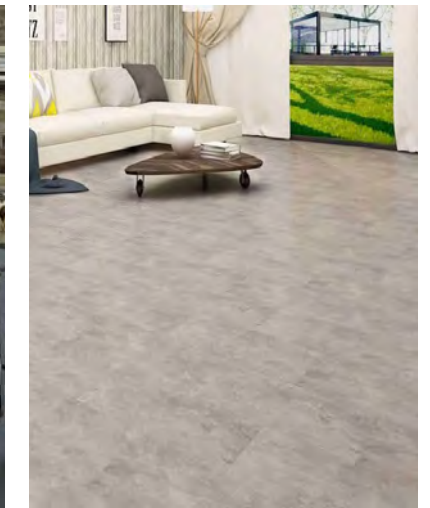



SPC/LVT FLOORING WOVEN & CARPET LOOK

Woven & carpet look SPC/LVT flooring offers an extremely realistic woven & carpet appearance while providing better waterproof, stain resistance and fire retardant performance than real woven & carpet flooring.



WOVEN & CARPET LOOK

The high definition decoration layer of SPC/LVT flooring offers the look and feel of woven & carpet flooring while delivering exceptional durability and stain resistance that will keep it looking fantastic for decades. Besides, our SPC/LVT flooring has great fire retardant performance and will not catch fire easily like real woven & carpet flooring.



WOVEN & CARPET LOOK SPC/LVT FLOORING

DURABLE AND EASY TO CLEAN FLOORING



EXCEPTIONAL DURABILITY

We offer a 25-year warranty for our residential SPC/LVT flooring and a 10-year warranty for our commercial SPC/LVT flooring. All our SPC/LVT flooring is provided with a wear layer that can withstand about 10,000 wear-resisting revolutions and higher. It ensures our SPC/LVT flooring works well in both residential and commercial environments.



STAIN RESISTANCE

SPC/LVT flooring surface is covered with a specially treated UV layer and wear layer that provide excellent stain resistance performance. Besides, SPC/LVT flooring is 100% waterproof and stains can be completely removed with a broom or a wet mop. It helps you save a lot of time on flooring cleaning.



FLAME RETARDANT

According to the statistics of authoritative departments, 95% of the people injured in fires are harmed by toxic gas generated when burning. The main component of SPC/LVT flooring is natural limestone powder: in case of fire, SPC/LVT flooring has great flame retardant performance and will not produce asphyxiating, toxic or harmful gas.



EASY INSTALLATION

Our SPC/LVT flooring is provided with Unilin click systems for simple and quick installation, which makes glue-free and nail-free installation possible. Tiles and planks click into place with one simple movement. Besides, it can be easily installed on a variety of subfloors or existing flooring, saving you time and money.



100% WATERPROOF

As the SPC/LVT vinyl layer is completely waterproof, SPC/LVT flooring has excellent waterproof and dampproof performance. Mildew will not happen on SPC/LVT flooring, which keeps your floor as good as new. As a result, it is widely used in laundry rooms, bathrooms, basements and kitchens.



ANTI-SLIP

Compared with other flooring materials, SPC/LVT flooring has great anti-slip performance. When SPC/LVT flooring is wet, the friction increases and the feet keep a better grip. In this way, pedestrians and customers can effectively avoid slipping and falling on wet floors.




ECO-FRIENDLY

Made of 100% recycled natural limestone powder and virgin PVC, all our SPC/LVT flooring is free of heavy metals, phthalates, methanol and other harmful substances. It does no harm to the environment or the human body.




EASY MAINTENANCE

SPC/LVT flooring is easy to clean. It only requires regular vacuuming or sweeping and occasional mopping. Normal dirt and debris can be easily swept away with a broom. Sticky spots can be easily removed with a wet mop for a more intense clean. It is a great choice for busy households.

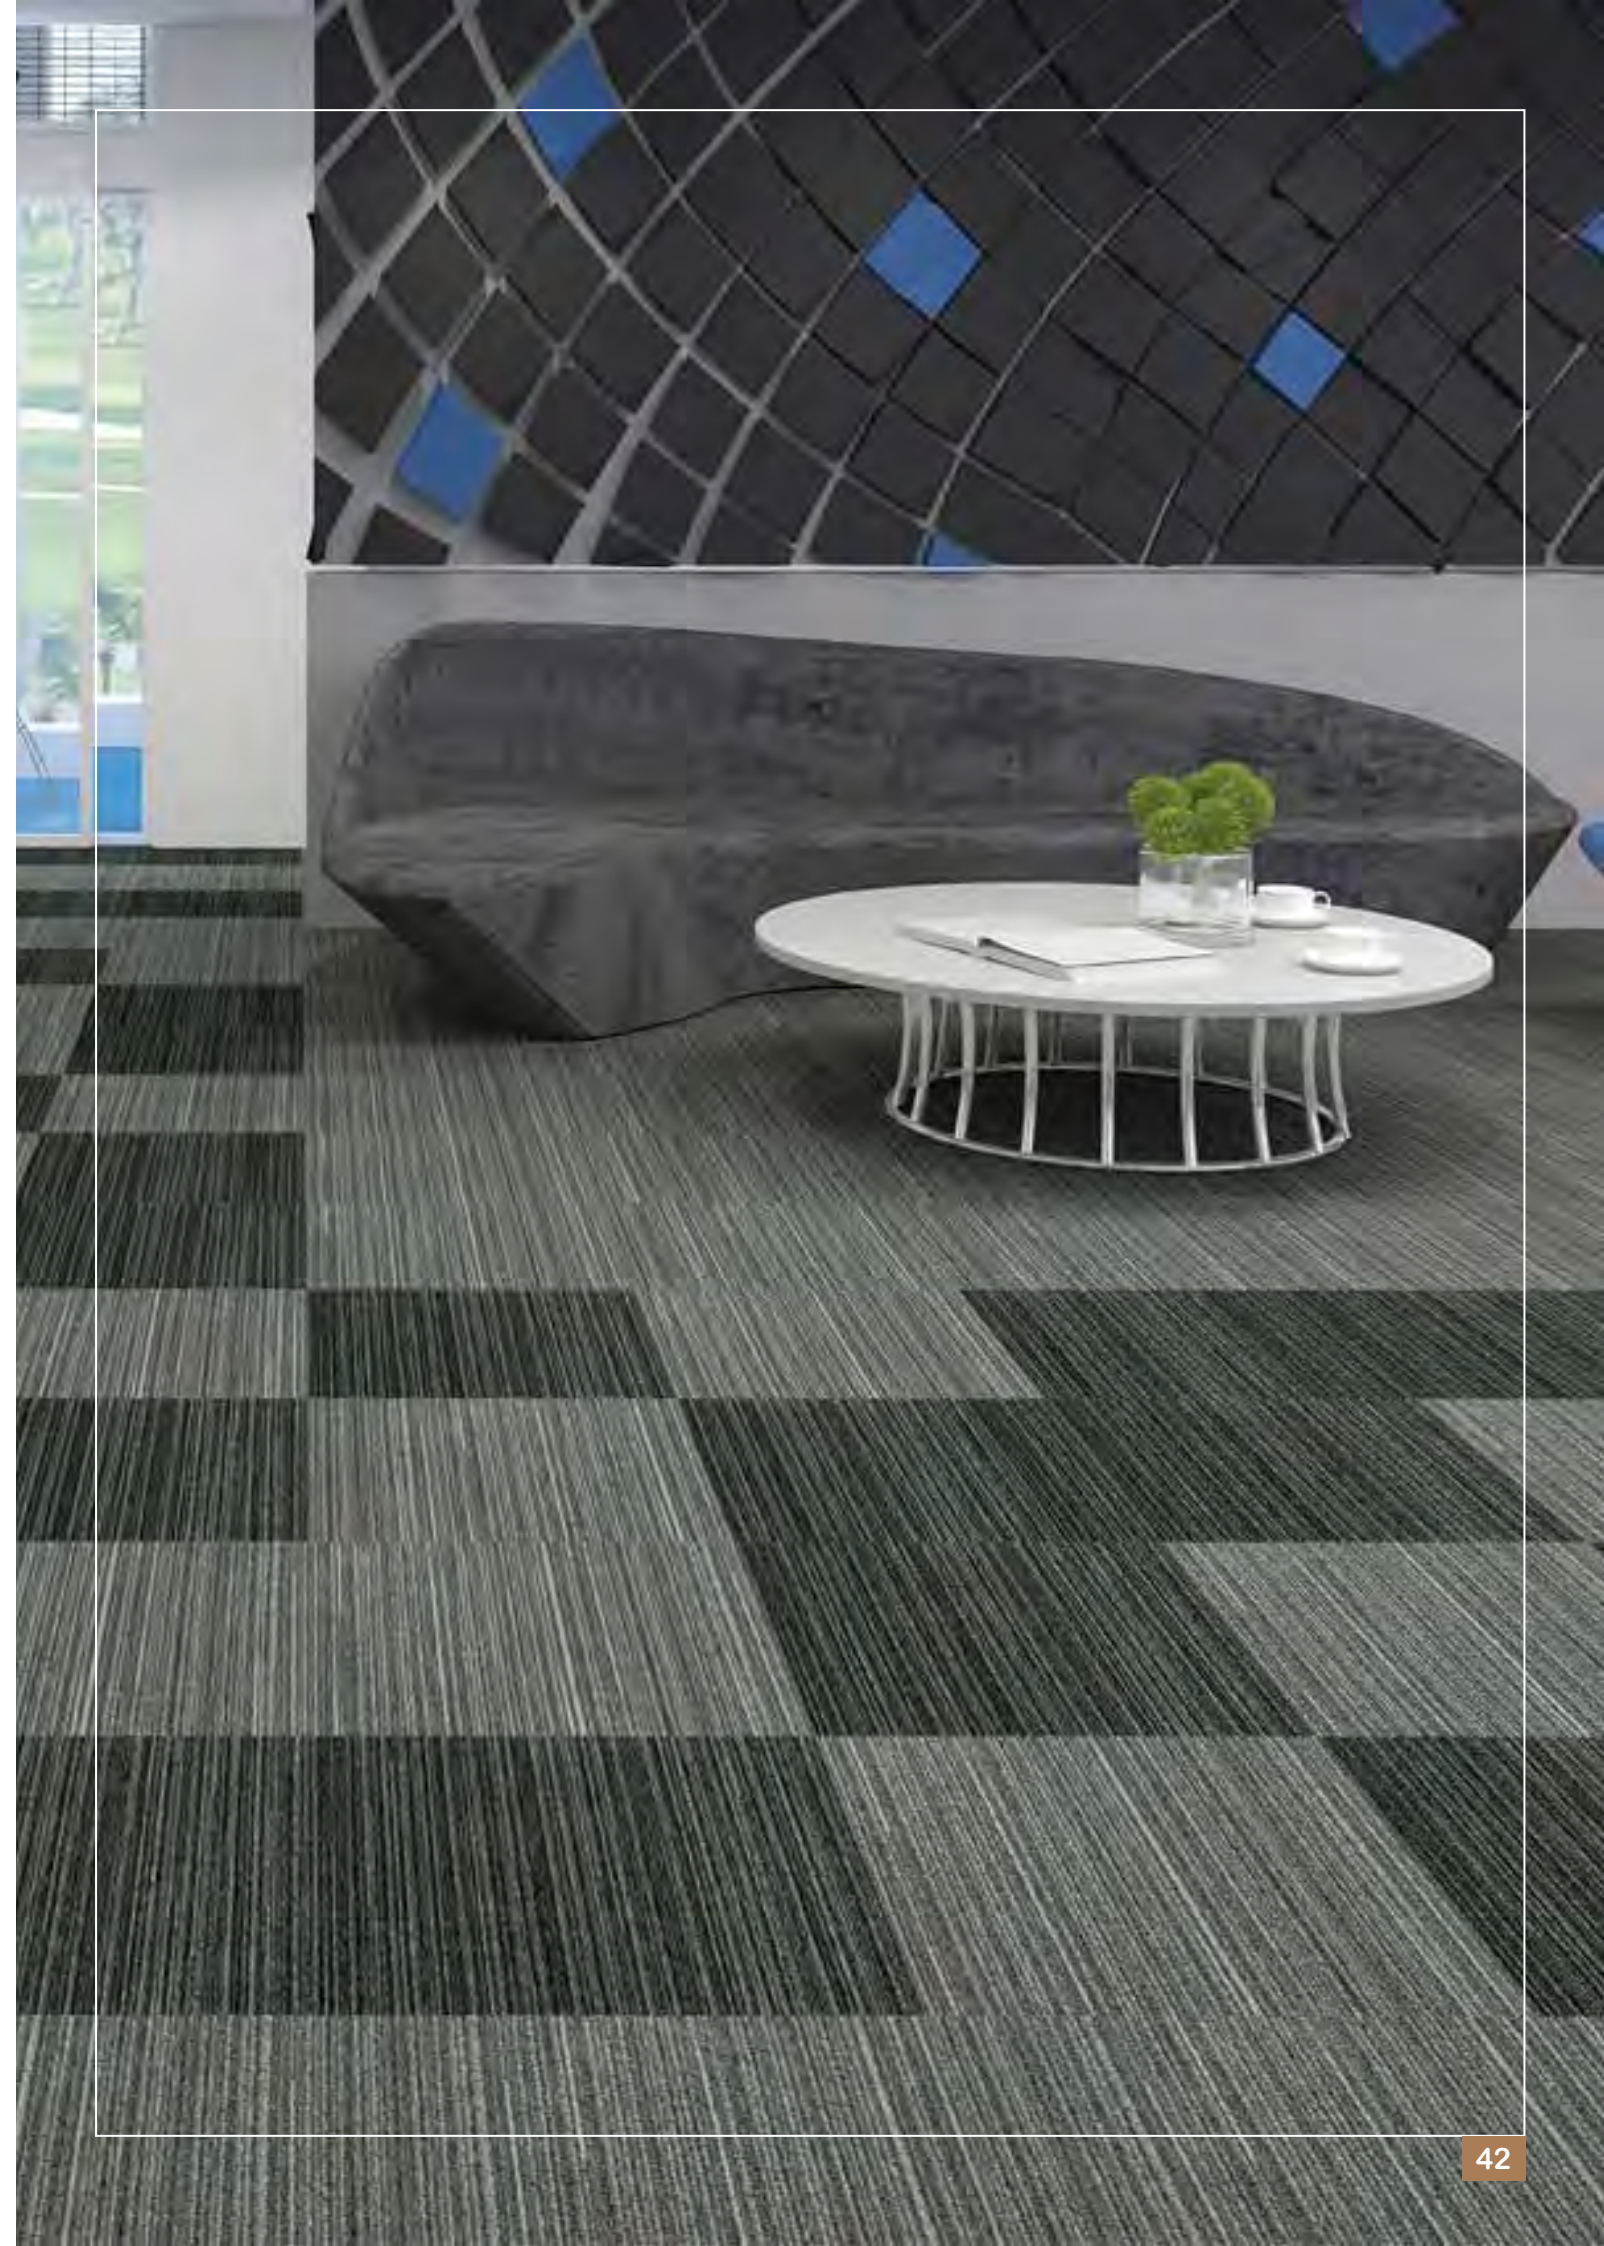




WOVEN & CARPET LOOK SPC/LVT
FLOORING
SURFACE PATTERNS

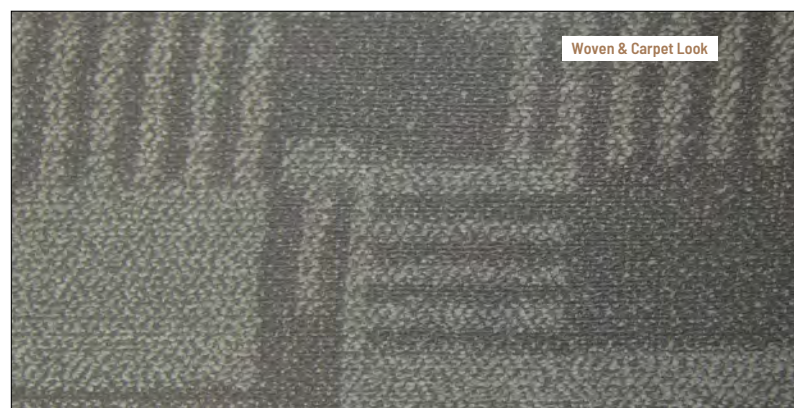

WH-2001



WH-2002

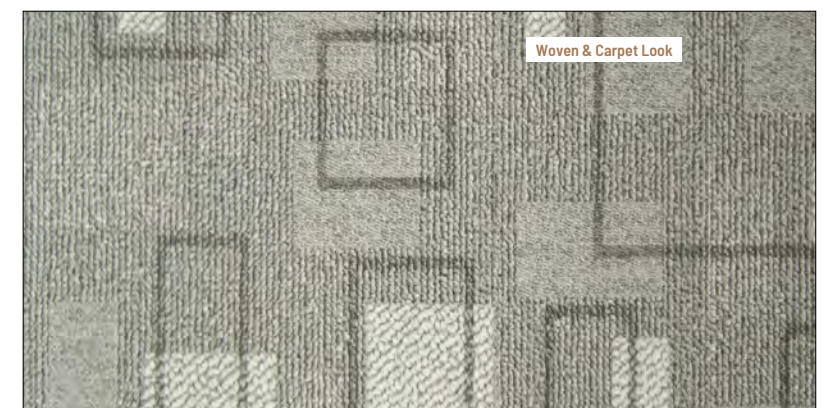

WH-2003

WOVEN & CARPET LOOK SPC/LVT FLOORING

INSTALLATION & MAINTENANCE

Precautions before installation


-  SPC flooring should be leveled and placed on site with constant temperature and stability for 24 hours before installation;
-  Make sure the subfloor is smooth and clean before installing the flooring, without any residue;
-  When installing the flooring, the indoor temperature should be kept between 15 °C and 28 °C. Indoor temperature and surface temperature at 15 °C are recommended. When the temperature is lower than 5 °C or higher than 30 °C, the installation shall not be performed. The relative air humidity suitable for construction should be between 20% and 75%.
-  The moisture content of the base layer shall be less than 3%. The strength of the base layer shall not be lower than the requirement of concrete strength C-20, otherwise suitable self-leveling should be used to strengthen the strength. The surface hardness of the base layer is not less than 1.2 MPa.

INSTALLATION




STEP 1

Before installation, it is recommended to spread floor film, which can make better feeling of feet and prevent the noise generated between the ground and the floor by small grains of sand. Put the first floor from the left corner of the room.

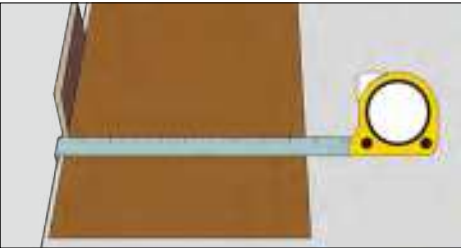


STEP 2

To prevent the natural expansion of the floor, at least 0.4 cm gap should be reserved between the wall and the floor.

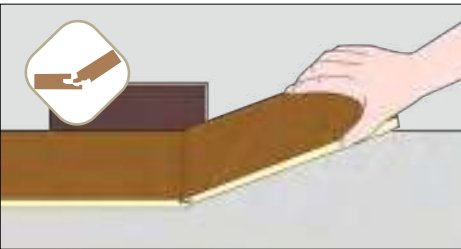


STEP 3

When installing the first and second floor, insert the convex damage of the short side into the groove of the first floor. Continue to use the above method to install other floors.

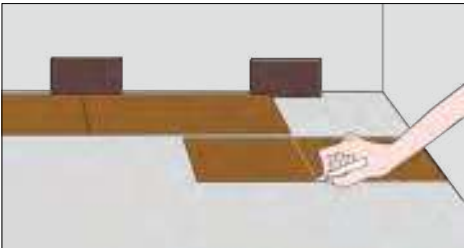

STEP 4

When installing the last piece of the first row, you need to take the remaining part of the floor measurement first, and note that the floor needs to be measured in reverse.

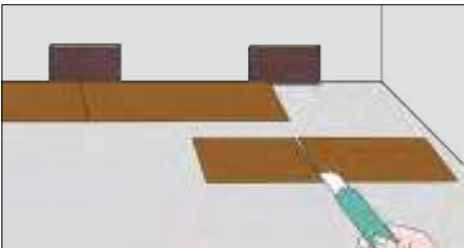

STEP 5

Finally, use the art knife to force the floor surface, break it by hands easily, then install the last floor of the first row.




STEP 6

Start installing the second row. When installing the second floor, insert the convex of the short side into the groove of the previous floor, and gently insert the convex of the long side into the corresponding floor groove.



STEP 7

Use a rubber hammer when there are gaps.

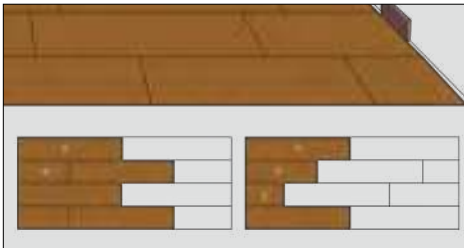

STEP 8

Recommended installation method reference picture.



STEP 9

Finally, the same method can be used to install other floors in the room to ensure that necessary expansion gaps are left between all fixed vertical planes in the room, including doors, walls, cabinets and other fixed objects.



WOVEN & CARPET LOOK SPC/LVT FLOORING **100% WATERPROOF**

Thanks to the high durability and 100% waterproof performance, it only takes a few simple care and maintenance steps to keep your SPC/LVT flooring looking new and beautiful for years to come.



Always clean up spills or liquids immediately.



Clean dust and debris regularly with a broom or vacuum with soft bristles.



Mop as needed, use a dampened mop and cleaner approved for use on SPC/LVT flooring. Never use harsh cleaning chemicals on SPC/LVT flooring to avoid floor damage.



Use felt protectors or other protective devices under furniture. Never push, pull, or drag furniture across SPC/LVT flooring. Always lift and carry.




Heavy furniture or appliances that are not moved often should be equipped with flat, nonstaining floor protectors.



Place mats at exterior doors to reduce dirt and debris tracked into floor. Do not use mats with rubber or latex backers as they may cause discoloration or staining to SPC/LVT flooring.




For spot stain treatment, use a diluted bleach solution that is 1 part bleach, 10 parts water.

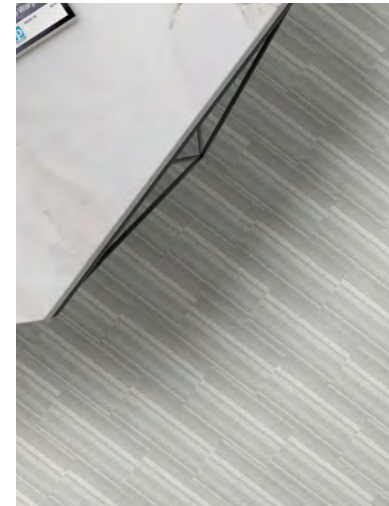

FLOORING ACCESSORIES

Flooring accessories are an essential part of every flooring project as every floor needs accessories of one sort or another to perfectly fit your selection of flooring and give a stunning effect for your project. We can offer all kinds of accessories you need to ensure your new floor goes down with style.

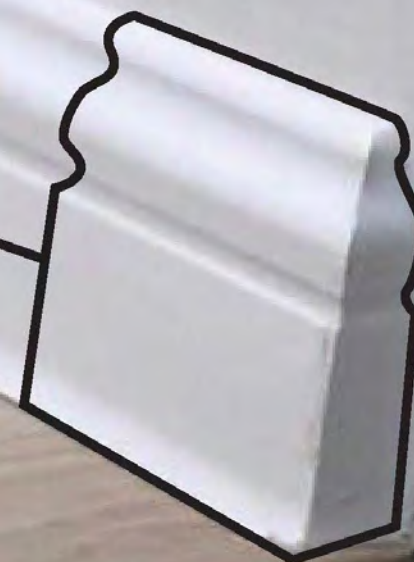

SPC/PVC SERIES

						
		T-MOULDING	REDUCER A	END CAP	REDUCER B	STAIR NOSE A
		FNSTM	FNSRD	FNSTM	FNSEC	FNSRD B
Thickness of flooring	mm	≥4	≥4	≥4	≥4	≥4
	in.	≥0.16	≥0.16	≥0.16	≥0.16	≥0.16
Item Size	mm	2400x45x6	2400x45x6	2400x45x8	2400x35x8	2400x45x9
	in.	94.5*1.77*0.24	94.5*1.77*0.24	94.5*1.77*0.31	94.5*1.38*0.31	94.5*1.77*0.31
CTN Packing	pcs/ctn	25	25	25	25	25
	pcs/20GP	23,400	23,400	25,200	35,100	25,200
Pallet packing	pcs/20gGP	20,800	20,800	19,200	28,800	19,200
CTN Size	mm	2420x125x80	2420x125x80	2420x125x85	2420x125x65	2420x125x85
	in.	95.3*4.92*3.15	95.3*4.92*3.15	95.3*4.92*3.35	95.3*4.92*2.56	95.3*4.92*3.35
Weight/ctn	kg	15.5	15.5	17	14.5	18
	lbs	34.1	34.1	37.4	31.9	39.6

						
		STAIR NOSE B	STAIR BOARD R	STAIR BOARD L-A	SKIRTING 60	SKIRTING 90
		FNSSNB	FNSSBR	FNSSBL-A	FNSS60	FNSS90
Thickness of flooring	mm	≥4	≥4	≥4	≥4	≥4
	in.	≥0.16	≥0.16	≥0.16	≥0.16	≥0.16
Item Size	mm	2400x72x25	2400x115x24	2400x130x25	2400x60x12	2400x90x15
	in.	94.5*2.83*0.98	94.5*4.53*0.94	94.5*5.1*0.98	94.5*2.3*0.47	94.5*3.5*0.59
CTN Packing	pcs/ctn	10	10	10	10	10
	pcs/20GP	8,280	8,400	7,500	13,700	8,800
Pallet packing	pcs/20gGP	6,400	5,760	5,280	10,240	6,720
CTN Size	mm	2420x125x100	2420x155x85	2420x155x95	2420x125x65	2420x140x90
	in.	95.3*4.92*3.94	95.3*6.10*3.35	95.3*6.1*3.74	95.3*4.92*2.55	95.3*5.5*3.5
Weight/ctn	kg	17.5	22.5	28	8.5	24
	lbs	38.5	49.5	61.7	18.7	52.9

						
		SKIRTING 80	SKIRTING 100	INSIDE CORNER MOULDING	U-TRACK	
		FNSS80	FNSS100	FNPIC	FNUT4	FNUT8
Thickness of flooring	mm	≥4	≥4	≥4	≤6	≤6
	in.	≥0.16	≥0.16	≥0.16	≤0.24	≤0.24
Item Size	mm	2400x80x12	2400x100x15	2400x28x15	2400x11x4	2400x12x8
	in.	94.5*3.15*0.47	94.5*3.94*0.59	94.5*1.10*0.59	94.5*0.43*0.16	94.5*0.47*0.31
CTN Packing	pcs/ctn	10	10	30	300	300
	pcs/20GP	10,500	7,570	28,080	174,300	107,100
Pallet packing	pcs/20gGP	7,680	5,280	23,040	174,300	107,100
CTN Size	mm	2420x125x85	2420x155x95	2420x125x90	2420x125x80	2420x125x80
	in.	95.3*4.92*3.35	95.3*6.1*3.74	95.3*4.92*3.54	95.3*4.92*3.15	95.3*4.92*3.15
Weight/ctn	kg	14.5	17.5	17	42	70
	lbs	31.9	38.6	37.4	92.4	154

				
		STAIR BOARD L-B	U-TRACK(plastic)	QUARTER ROUND
		FNSSBL-B	FNUTP	FNSQR
Thickness of flooring	mm	≥4	≤6	≥4
	in.	≥0.16	≤0.24	≥0.16
Item Size	mm	2400x110x33	2400x14x6	2400x28x15
	in.	94.5*4.3*1.3	94.5*0.55*0.24	94.5*1.10*0.59
CTN Packing	pcs/ctn	4	300	25
	pcs/20GP	4460	107,100	28,080
Pallet packing	pcs/20gGP	3328	107,100	23,040
CTN Size	mm	2420x125x80	2420x125x80	2420x125x90
	in.	95.3*4.92*3.15	95.3*4.92*3.15	95.3*4.92*3.54
Weight/ctn	kg	20	30	18.5
	lbs	44	66	40.7


WPC SERIES



		T-MOULDING		REDUCER A		END CAP	
		FNWT1	FNWT2	FNWR1	FNWR2	FNWEC1	FNWEC2
Thickness of flooring	mm	≤6	≤6	≤6	≤6	≤6	≤6
	in.	≤0.24	≤0.24	≤0.24	≤0.24	≤0.24	≤0.24
Item Size	mm	2400x45x7	2400x45x9	2400x45x9	2400x45x12	2400x35x9	2400x35x12
	in.	94.5*1.77*0.28	94.5*1.77*0.35	94.5*1.77*0.35	94.5*1.77*0.47	94.5*1.38*0.35	94.5*1.38*0.47
CTN Packing	pcs/ctn	25		25		25	
	pcs/20GP	26,100		25,200		35,100	
Pallet packing	pcs/20gGP	20,800		19,200		27,200	
CTN Size	mm	2420x125x80		2420x125x85		2420x125x65	
	in.	95.3*4.92*3.15		95.3*4.92*3.35		95.3*4.92*2.56	
Weight/ctn	kg	13	15	15	16.3	13.8	15
	lbs	28.6	33	33	35.9	30.4	33



		QUARTER ROUND		INSIDE CORNER MOULDING		L-LINE	
		FNWQR		FNWIC		FNWLL	
Thickness of flooring	mm	≤ > 6	> 6	≤6	> 6	≤6	> 6
	in.	≤0.24	> 0.24	≤0.24	> 0.24	≤0.24	> 0.24
Item Size	mm	2400x28x15	2400x28x15	2400x28x15	2400x28x15	2400x25x25	2400x35x12
	in.	94.5*1.10*0.59	94.5*1.10*0.59	94.5*1.10*0.59	94.5*1.10*0.59	94.5*0.98*0.98	94.5*1.38*0.47
CTN Packing	pcs/ctn	30		30		50	
	pcs/20GP	28,080		28,080		70,200	
Pallet packing	pcs/20gGP	23,040		23,040		57,600	
CTN Size	mm	2420x125x90		2420x125x90		2420x125x65	
	in.	95.3*4.92*3.54		95.3*4.92*3.54		95.3*4.92*2.56	
Weight/ctn	kg	20	20	17	17	27	27
	lbs	44	44	37.4	37.4	59.4	59.4



		STAIR NOSE A		STAIR NOSE B		BIG STAIR BOARD		SKIRTING 60		STAIR BOARD	
		FNWSNA		FNWSNB		FNWSB		FNWS60		FNWSB	
Thickness of flooring	mm	≤6	> 6	≤6	> 6	≤6	> 6	≤6	> 6	≤6	> 6
	in.	≤0.24	> 0.24	≤0.24	> 0.24	≤0.24	> 0.24	≤0.24	> 0.24	≤0.24	> 0.24
Item Size	mm	2400x55x18		2400x72x25		2200x300x24		2400x60x12		2400x115x24	
	in.	94.5*2.17*0.71		94.5*2.83*0.98		86.6*11.81*0.94		94.5*2.36*0.47		94.5*4.53*0.94	
CTN Packing	pcs/ctn	10		10		10		10		10	
	pcs/20GP	9,360		8,280		8,200		13,700		8,400	
Pallet packing	pcs/20gGP	7,680		6,400		5,280		10,240		5,760	
CTN Size	mm	2420x125x90		2420x125x100		2220x155x95		2420x125x65		2420x155x85	
	in.	95.3*4.92*3.54		95.3*4.92*3.94		87.4*6.1*3.74		95.3*4.92*2.56		95.3*6.1*3.35	
Weight/ctn	kg	16.5		18.5		50		13.5		23.5	
	lbs	36.3		40.7		110.2		29.8		51.7	



		SKIRTING 80		SKIRTING 90		U-TRACK(iron)		U-TRACK(plastic)	
		FNWS80		FNWS90		FNUT4	FNUT8	FNUTP	
Thickness of flooring	mm	≤6	> 6	≤6	> 6	≤6	> 6	≤6	
	in.	≤0.24	> 0.24	≤0.24	> 0.24	≤0.24	> 0.24	≤0.24	
Item Size	mm	2400x80x12		2400x90x15		2400x11x4	2400x12x8	2400x14x6	
	in.	94.5*3.15*0.47		94.5*3.54*0.59		94.5*0.43*0.16	94.5*0.47*0.31	94.5*0.55*0.24	
CTN Packing	pcs/ctn	10		10		300	300	300	
	pcs/20GP	8,280		8,320		174,300	107,100	107,100	
Pallet packing	pcs/20gGP	6,400		6,720		174,300	107,100	107,100	
CTN Size	mm	2420x125x100		2420x140x90		2420x125x80	2420x125x80	2420x125x80	
	in.	95.3*4.92*3.94		95.3*5.51*3.54		95.3*4.92*3.15	95.3*4.92*3.15	95.3*4.92*3.15	
Weight/ctn	kg	16.5		15.5		42	70	30	
	lbs	36.3		34.1		92.4	154	66	

PVC SERIES



		REDUCER-A	REDUCER-B	L-LINE A	L-LINE B	T-MOULDING
		FNPRD1	FNPRD2	FNPLL1	FNPLL2	FNPTM1
Item Size	mm	2400x30x6	2400x36x8	2400x24x15	2400x20x10	2400x35x7
	in.	94.5*1.18*0.24	94.5*1.42*0.31	94.5*0.87*0.51	94.5*0.79*0.39	94.5*1.38*0.28
CTN Packing	pcs/ctn	30	30	50	50	40
	pcs/20GP	36,720	22,500	70,200	70,200	-
Pallet packing	pcs/20gGP	32,640	15,840	57,600	57,600	46,080
CTN Size	mm	2420x125x70	2420x155x95	2420x125x65	2420x125x65	2420x125x65
	in.	95.3*4.92*2.76	95.3*6.1*3.74	95.3*4.92*2.56	95.3*4.92*2.56	95.3*4.92*2.56
Weight/ctn	kg	7	15.5	12.5	12.5	16.5
	lbs	15.4	34	27.5	27.5	36.3



		T-MOULDING	STAIR NOSE A	STAIR NOSE B	SKIRTING 60	U-TRACK(plastic)
		FNPTM2	FNPSNA	FNPSNB	FNPS60	FNUTP
Thickness of flooring	mm	-	≥4	≥4	≥4	≤6
	in.	-	≥0.16	≥0.16	≥0.16	≤0.24
Item Size	mm	2400x25x6	2400x20x15	2400x50x26	2400x60x12	2400x14x6
	in.	94.5*0.98*0.24	94.5*0.79*0.59	94.5*1.97*1.02	94.5*2.36*0.47	94.5*0.55*0.24
CTN Packing	pcs/ctn	40	50	10	20	300
	pcs/20GP	56,160	70,200	35,100	17,700	107,100
Pallet packing	pcs/20gGP	46,080	57,600	28,800	13,440	107,100
CTN Size	mm	2420x125x65	2420x125x65	2420x125x80	2420x140x90	2420x125x80
	in.	95.3*4.92*2.56	95.3*4.92*2.56	95.3*4.92*3.14	95.3*5.5*3.54	95.3*4.92*3.15
Weight/ctn	kg	8.8	12.5	6.6	11.6	30
	lbs	19.4	27.5	14.5	25.6	66

ALU SERIES



		L-LINE	T-MOULDING	SKIRTING
		FNALL	FNATM	FNAS55
Item Size	mm	2400x20x20	2400x22x10	2400x55x12
	in.	94.5*0.79*0.79	94.5*0.87*0.39	94.5*2.17*0.47
CTN Packing	pcs/ctn	60	60	10
	pcs/20GP	69,720	84,240	12,240
Pallet packing	pcs/20gGP	69,120	69,120	10,880
CTN Size	mm	2420x125x60	2420x125x60	2420x125x70
	in.	95.3*4.92*2.36	95.3*4.92*2.36	95.3*4.92*2.76
Weight/ctn	kg	21.5	15	7.5
	lbs	47.3	33	16.5



WALDHÖF

MADE BY NATURE

SPC / LVT FLOORING & ACCESSORIES